

# TUC-24G-HC~FGD01

Undercounter Foodservice Refrigerator, 1 Glass Swing Door



Dimensions		Build		Technical	
External Width (mm)	610	Door Description	1 Full Glass Swing Door	Temperature Holding	0.5 : 3.3°C
External Depth (mm)	627	Door Opening	Right (standard) or Left.	Refrigerant	R290
External Height (mm)	802	Exterior Construction	Stainless steel front & countertop, aluminium sides & rear	Voltage / Frequency / Phase	220-240V/50-60Hz/1
Exclusions	Depth does not include 26mm for rear bumpers and 42mm for door handle.	Interior Construction	Clear coated aluminium, stainless steel base	Amps	1
Net Volume (Litres)	94	Air Intake Position	Front	Wattage	230
Gross Volume (Litres)	158	Ventilation Position	Front	Temperature Class	M1
Display Area (m <sup>2</sup> )	0.25	Clearance Required	Zero back and sides	Operating Statement	Tested at 25°C, 60% RH, per 'Refrigerators with a Direct Sales Function' for perishable food merchandising.
Supplied Shelves	2	Cord Length (Meters)	2.13	Testing Standard	EN 23953
Shelf Size (L x D mm)	One 508 x 352 + One 508 x 273	Internal Lighting	LED	EEC	A
Internal Net Height (mm)	600	Standard w/ Locks	standard	EEl	9.3
Unpackaged Weight (kg)	64			kWh/24hr	1.33
Packaged Weight (kg)	75			kWh/Annum	489
Packaged Dimensions (W x D x H mm)	788 x 762 x 1016			Defrost Type	Auto
Supplied with	Built-in recessed castors (7mm clearance)				



Specifications subject to change without notice.  
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")


UK & Ireland [0800 783 2049](tel:08007832049)  
EMEA [+41 61 563 07 05](tel:+41615630705)  
Australia [+61 2 9619 9999](tel:+61296199999)

[TfIUK@truemfg.com](mailto:TfIUK@truemfg.com)  
[TrueCHCustomerService@truemfg.com](mailto:TrueCHCustomerService@truemfg.com)  
[TrueRefAus@truemfg.com](mailto:TrueRefAus@truemfg.com)



# TUC-24G-HC~FGD01

Undercounter Foodservice Refrigerator, 1 Glass Swing Door

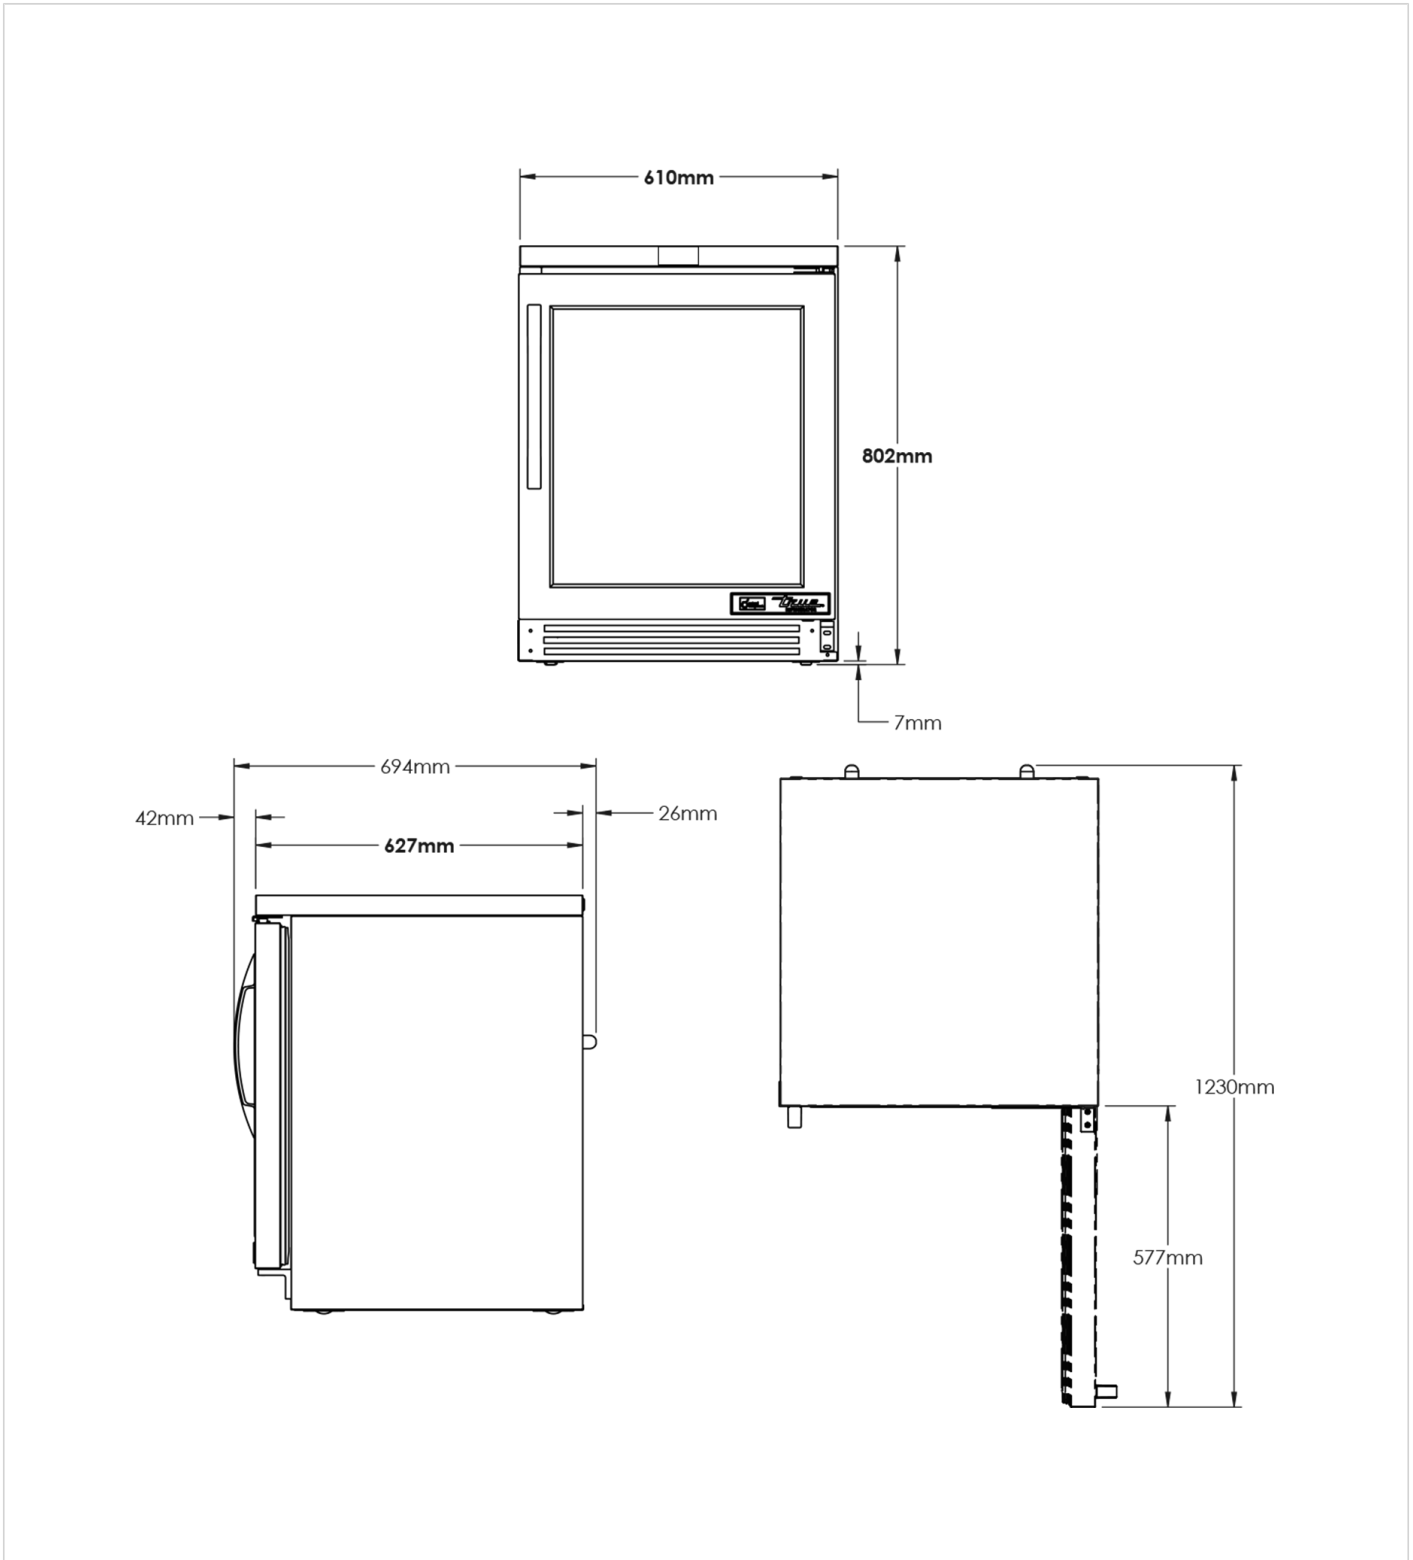

Specifications subject to change without notice.  
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland 0800 783 2049  
EMEA +41 61 563 07 05  
Australia +61 2 9619 9999

[TFIUK@truemfg.com](mailto:TFIUK@truemfg.com)  
[TrueCHCustomerService@truemfg.com](mailto:TrueCHCustomerService@truemfg.com)  
[TrueRefAus@truemfg.com](mailto:TrueRefAus@truemfg.com)

